



AI AppPack Server A5208 & AI Mini Server N1100

AI Deep-Learning for sophisticated video analytics, for both Rack Server and Mini Server: Face Recognition, LPR, Behavior Analysis, & Vehicle Classification

To ease system integration complexity, except for an "open-platform" VMS, GVD now has more products and features to help the VMS quickly engage in the most sophisticated AI VCA today, such as NEC, Solomon, and many Ai IP cameras.

The **AI Mini Server N1100** is an AI mini server to be close to your jobsites. It is powered by NVIDIA GPU to speed up data process & analysis. It supports trained AI models and works excellently for all AI scenarios. The **AI AppPack Servers A5208**, on the other hand, is an AI server to be deployed in a server room. The product has dual CPUs and supports up to four GPUs for high-speed video process.

GVD AI servers feature exclusive "virtual channels" to maximize the number of channels that need to run AI, so as to minimize the cost of AI.

- Exclusive "Virtual Channels" to bust the high-price of AI
- Top AI performance with dual CPUs and four GPUs
- Open Platform design to support ONVIF Profile-M and JSON interface
- Customization AI modeling for your special scenario or particular attributes detection via well-known Ai player Solomon META-avi to meet your projects requirements.
- GVD PASIA™ to make your Ai solutions from better to the best

GVD VMS support best-of-best Ai cameras and Ai servers to complete and meet various requirements of the projects in the markets today.

Another enhancement is PASIA™, a highly tailor-made service to help customers annotate the video images collected by the **AI AppPack Servers** or **AI Mini Server** to build a useful dataset for Deep-Learning.

GVD **AI AppPack Server** and **AI Mini Server** can quickly join a large project that relies heavily on AI analytics. They are your best choice for a reliable, accurate, and fast neural network.






VMS Features

■ 100,000 IP cameras support

GVD E4200 can team up with a variety of NVR models featured by GVD to handle 64~100,000 channels with unique “Device Management” & “Tag Management” functions.

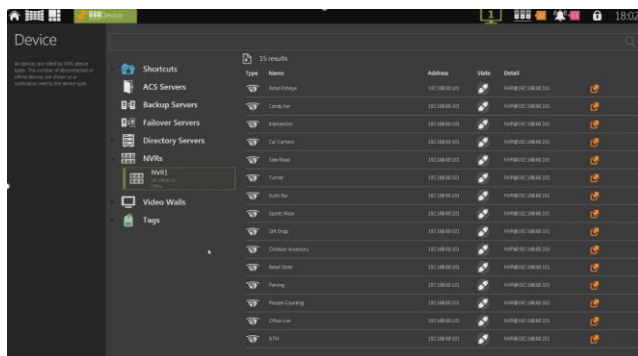

■ Ai Meta Data Search

The GVD’s new AI Smart Search offers powerful integration through a simple, standard JSON-based interface, can easily connect any AI cameras to GVD VMS platform.

The GVD VMS 4.0 AI Data Search GUI features an intuitive, user-friendly design that allows users to get hands-on quickly and efficiently.



■ Videowall synchronous display

An operator sitting at the management console (E4200) of VMS platform can freely change what to output on the videowall, by using Drag-and-drop to view live-video, play recorded video, change video pattern, start/stop video touring, etc.

■ iGance Dashboard

iGance is to give operators a quick comprehensive view of system status: Alarm, NVR, IP cams, network statistics, video analytics to ensure all operation and future maintenance.




■ Seamless Video on eMap

GVD VMS designed for video HA (high availability) to fetch the sources of the video from NVR or the redundant systems such as Failover server. Such HA videos are embedded on GVD eMap for easy and intuitive operation.

■ Automatic Self Maintenance

VMS 4.0 ToolSet kits for your important configuration and systems periodically restart automatically. VMS Toolset will show all of important messages from OS and your NVR for any necessary NVR maintenance steps.

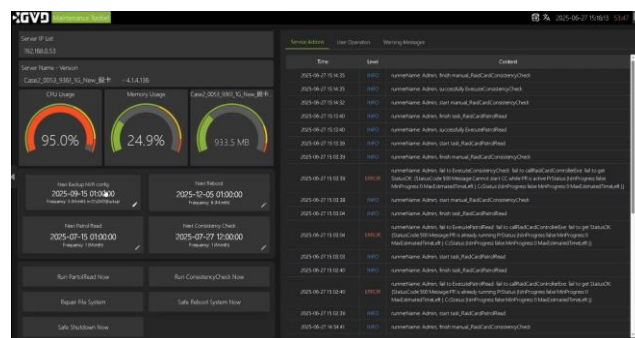

2. Assess



A5208 for Face Recognition

The independent NIST testing has repeatedly confirmed **NEC's** Facial Technology recognition and matching capability as the world's fastest and most accurate across all benchmarks and challenging conditions.

NEC Facial Technology couples recognition with real-time identification, verification, and situation analysis for quick decision-making, preemptive security, and smoother services.

Installed in over 1,000 major systems in more than 70 countries and regions worldwide, **NEC** Facial boasts a stellar track record and wealth of practical experience.

GVD **VMS** has integrated **NEC** Facial Technology as parts of GVD **AppPack Server** systems to have provided complete solutions to retail, banking, hotel, etc with GVD **VMS** powerful toolkits: *CaseBuilder*, *eMap*, and *iGlance*.

GVD features

- Retrieves a face hit on map
- Retrieves a face hit with relevant video
- Supports watch lists of face hits
- Supports the setup of face hit alarm (with GVD Rule Wizard)
- Pushes face hit notices onto mobile phones and tablets
- Documents of your investigation of faces (with GVD CaseBuilder)

XGVD Local Monitor | Ai Investigate | Hotlist | Alarm List | 18:32

Object/Human
Within 2 Hrs
Investigate 1 cam

Advanced Setting
Hotlist
Confidence: 44%

Select Upper Region Color
Select Lower Region Color

All 324 | Gender: 54 | Age Zone: 44 | Glasses: 9 | Mask: 1 | Upper Body: 54 | Lower Body: 54 | Hat: 54 | Bag: 54

Male: 28 | Female: 26 | Youth: 37 | Middle age: 7 | Glasses: Yes: 9 | Mask: Yes: 1 | Short sleeves: 30 | Long sleeves: 24 | Long pants: 48 | Short pants: 6 | No hat: 54 | No bag: 40 | Backpack: 11 | Handbag: 3

2025-10-17 16:34:22 uni-camera
2025-10-17 16:34:22 uni-camera
2025-10-17 16:35:35 uni-camera
2025-10-17 16:35:35 uni-camera
2025-10-17 16:35:40 uni-camera
2025-10-17 16:35:40 uni-camera
2025-10-17 16:35:43 uni-camera
2025-10-17 16:35:43 uni-camera
2025-10-17 16:35:53 uni-camera
2025-10-17 16:35:53 uni-camera
2025-10-17 16:36:01 uni-camera
2025-10-17 16:36:01 uni-camera

male 98.77% alert
width: 60
height: 181
Size 558
distance: 5; quick walk
features: glasses, shorts, shirt

female 94.88%
width: 34
height: 166
Size 348
distance: 16; walk
features: sweater, pants, backpack

female 95.36%
width: 50
height: 157
Size 466
distance: 20; walk
features: jacket, pants, shoulderbag

A5208 & N1100 for LPR, Vehicle Classification, & Behavior Analysis

Vehicle classification

People have been using AI to improve city traffic. A city installs HD cameras to collect and pass images to cloud AI for vehicle classification, like sedans, buses, trucks, scooters, mopeds, motorcycles, etc. So, the video system can estimate vehicle speeds, calculate traffic flow, and improve traffic while saving city police workforce. However, since urban environment is frequently complex, GVD use "Deep Learning" that works like human brains to tell various vehicle types by merely looking at it. With GVD, traffic prediction is highly accurate.

LPR

GVD LPR is diversified optimized. Hardware-wise, it uses nVIDIA GPU to boost image processing. Software-wise, it uses the latest AI, including YOLO, CNN, *Deep-Learning*, and GVD proprietary *PASIA™* to get the best accuracy even in defective camera angles. Budget-wise, it features "Virtual Channels" to maximize the available AI channels. Function-wise, it features an "AI-Polarizer" that uses multiple filters to quickly retrieve a specific vehicle from a large video source.

Exclusive Virtual Channels



GVD AI products feature exclusive "virtual channels" to bust the high-price of AI. "Virtual channels" deal with "per-frame" analysis, which means a physical AI channel only needs to read the key frames for analysis to save AI resources to other non-physical AI channels.

Behavior analysis


As terrorist attacks became more often across the globe in the past two decades, people are increasingly concerned about their safety in some public places, such as bus stations, subways, building lobbies, or shopping malls.

GVD's AI AppPack Server A5208 leverages max. 4 GPUs to accelerate data process to pinpoint and analyze object behaviors in a complex environment with accuracy.

For example, in an ATM arcade, behavior analysis can detect and alarm when a person lingers for a prolonged time. On the staircase of a bus terminal, behavior analysis can alarm when a tourist remains for longer than a defined time, or in a healthcare center, behavior analysis can watch whether an aged falls.

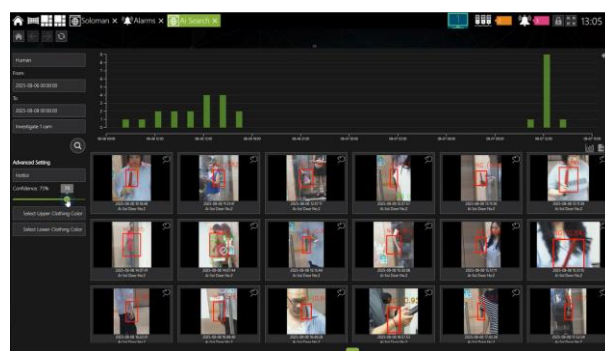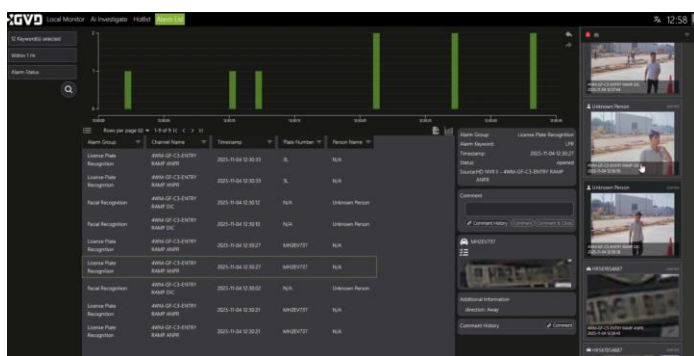

System Architecture

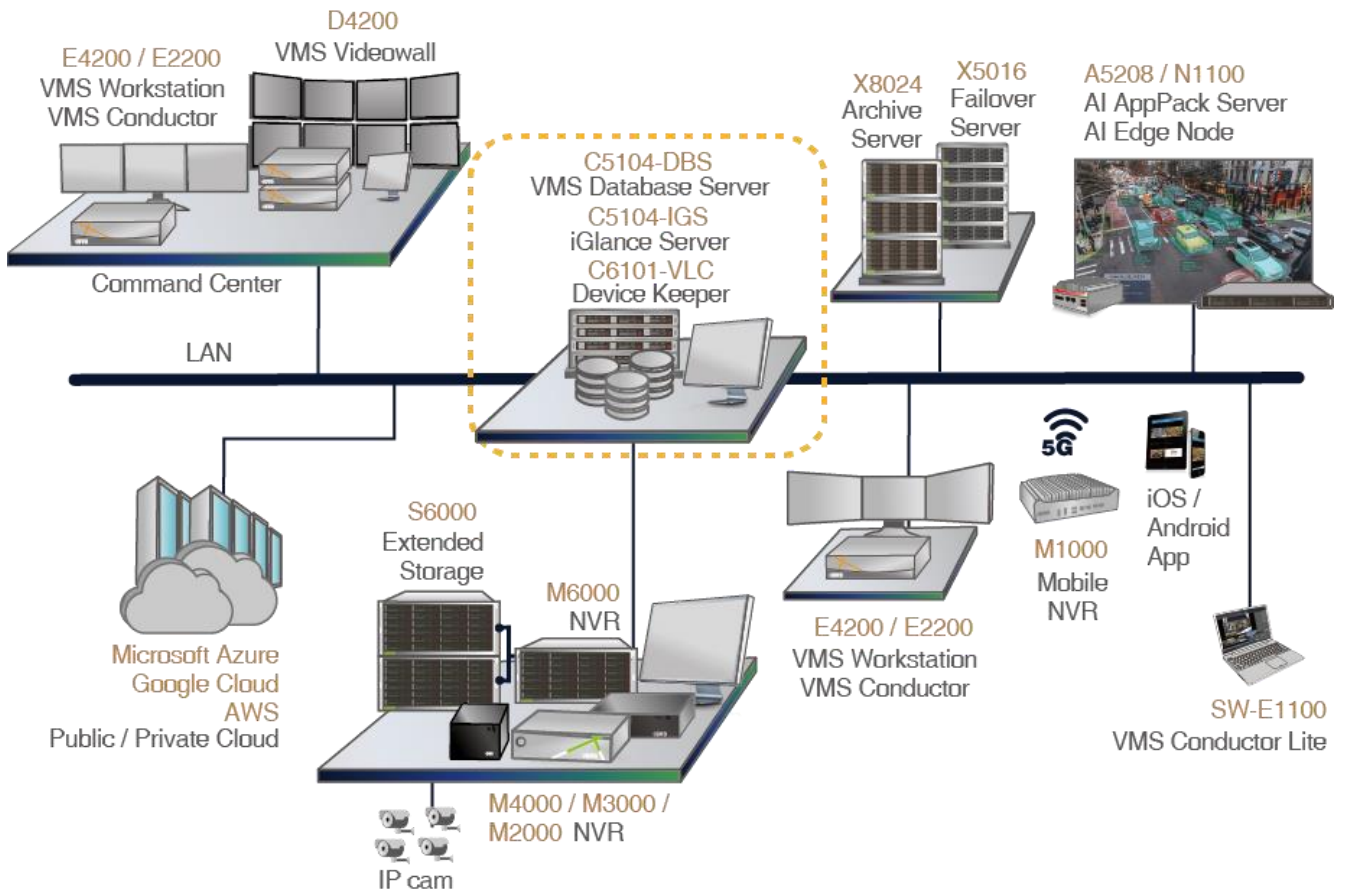

Ordering Information

Part No.	Description	
A5208-FGC-NE04C02K	NEC SFA Server	4 x NEC SFA F-Ch, with 2,000 targets and 300K records, supporting 20 x V-Ch, 80fps, CaseBuilder
A5208-FGC-NE16C05K	NEC SFA Server	16 x NEC SFA F-Ch, with 5,000 targets and 300K records, supporting 80 x V-Ch, 80fps, CaseBuilder
A5208-FGC-NE20C10K	NEC SFA Server	20 x NEC SFA F-Ch, with 10,000 targets and 300K records, supporting 100 x V-Ch, 80fps, CaseBuilder
A5208-KNG-NE20C03K	NEC SFA-Ready Server	Opt.: Max. 20 x NEC SFA K-Ch, with 3,000 targets and 300K records, supporting 20~100x V-Ch, 80fps, CaseBuilder
A5208-LPR	GVD LPR Server	Supporting 55~200 x V-Ch, 110fps, 2x~5x playback speeds, iGlance, CaseBuilder
A5208-TRC	GVD Vehicle Classification Server	Supporting 70~200 x V-Ch, 200fps, 4x~10x playback speeds, iGlance, CaseBuilder
A5208-BHA	GVD Behavior Analysis Server	Supporting 20~60 x V-Ch, 60fps, 2x~4x playback speeds, iGlance, CaseBuilder
N1104-YHX	GVD Ai Matrix	Supporting 4~16 x V-Ch
	People Ai	face detection, glass detection, face recognition, masks, safety helmets, mobile phone usage, missing safety helmets, missing masks, apparel color detection, gender, age, backpack
	Object and Vehicle ai	smoking/fire detection, missing object, LPR(limited countries), vehicle classification, vehicle color blacklist, whitelist support

Hardware Specifications



Product		A5208-FGC / KNG	A5208-TRC/BHA/LPR	N1104-YHX
Description		AI AppPack Server-NEC	AI AppPack Server	AI Matrix Server
System	CPU	Dual CPUs: Intel® Xeon® Silver 4210R		8-core NVIDIA Cortex
	Memory	64GB DDR4		16GB
	OS	Windows® 10 IoT Enterprise		Linux OS
	Watchdog	Hardware watchdog & software watchdog		
Storage	Interface	3.5" (Hot-swap)		
	Disk tray	8		
	Storage capacity	8 x 20TB		
	RAID level	N/A		
Display	Output	1 x VGA		1 x HDMI
	GPU	2x RTX 3080		NVIDIA Ampere, 32 Tensor Core
	Local display resolution	4096 x 2160		
Network	Interface	2 x 10GbE		2 x 10/100/1000 Mbps
	Protocols	IPv4, TCP/IP, UDP, HTTP, HTTPs, SMTP, SNMPv2, DNS, DDNS, DHCP, NTP, ARP, ICMP, FTP, RTSP/RTP/RTCP, IGMPv3, UPnP, CIFS, NFS		IPv4, TCP/IP, UDP, HTTP, HTTPs
Interface	USB port	Front: 2 x USB3.0; Rear: 2 x USB3.0 + 2 x USB2.0		2 x USB 3.0
	Serial COM port	1 x		1x
Power	Voltage	100-240 Vac, 50-60Hz		DC 9~12V
	Redundancy	Yes		N/A
	PSU	2200W 1+1 redundant power supply,		
Environment	Operating temp.	0~35°C (32~95°F)		-10°C ~ +55°C
	Storage temp.	-20~60°C (-4~140°F)		-20°C ~ +60°C
	Operating humidity	10~85%@40°C		40°C, 95%
	Storage humidity	10~95%@40°C		
Mechanic	Chassis	4U rackmount		Mini Server
	Certification	CE, FCC		
	Dimensions (W)x(H)x(D)	178 x 462 x 673mm		137 x 70.4 x 133 mm
	Net weight w/o HDD	20.9kg		